


Product RFL-300R3


LED indicator
color red

| | |
|----------------------------|---------------|
| product-catalog | LED indicator |
| color | red |
| part no | RFL-300R3 |
| forward current [mA] | 17 - 20 |
| reverse voltage typ. [V] | 24 - 28 |
| wavelength [nm] | 635 |
| rec. mounting hole Ø [mm] | 6.0/+0.2 |
| operating temperature [°C] | -25 .. +80 |
| storage temperature [°C] | -30 .. +85 |

| | |
|------------------------------------|-------|
| chip construction | GaAsP |
| forward current max. [mA] | 30 |
| reverse voltage max. [V] | 5 |
| luminous intensity (@ 15 mA) [mcd] | 15 |

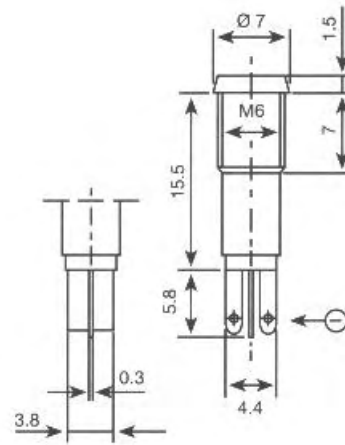

optional connector :
(part no 125-RFL-300-3)

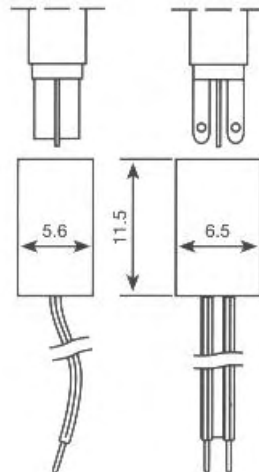

tab terminals 2.8x0.5 nickel plated

LED indicator with M6 metric thread body for easy front panel mounting;
Chrome-plated brass housing, complete with nut and washer.
Optional IP67 (add appendix -IP67 to standard P/N).

note

- all dimension are in millimeter
- tolerance is ± 0.25 mm unless otherwise noted
- specifications are subject to change without notice
- version 1.0

