
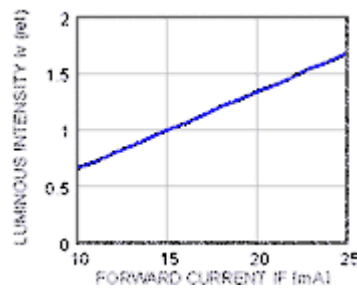


Product RFL 500 R3

LED indicator
color red

product-catalog	LED indicator
color	red
part no	RFL 500 R3
forward current [mA]	17-20
reverse voltage typ. [V]	24-28
wavelength [nm]	635
rec. mounting hole Ø [mm]	8.0/+0.2
operating temperature [°C]	-40 .. +80
storage temperature [°C]	-40 .. +85

chip construction	GaAsP
forward current max. [mA]	30
reverse voltage max. [V]	5
luminous intensity (at 15 mA) [mcd]	35

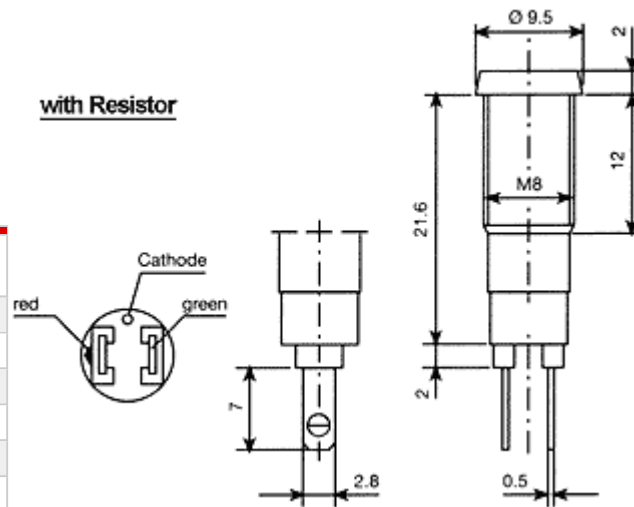

tab terminals 2.8x0.5 nickel plated

LED indicator with M8x0.75 metric thread body for easy front panel mounting; Chrome-plated brass housing, complete with nut and washer. Optional IP67 (add appendix -IP67 to standard P/N).

note

- all dimension are in millimeter
- tolerance is ± 0.25 mm unless otherwise noted
- specifications are subject to change without notice
- version 1.0

